




# Ceiling Filter Modules

HepaMax/ UlpaMax MiniPleat Modules Filter

HepaMax- 99.995% / H14 & UlpaMax - 99.9995% / U15

## Efficiencies

Efficiency	EN 1822 Standard
99.999% @ 0.3µm	99.995% (H14)
99.9995% @ 0.12µm	99.9995% (U15)

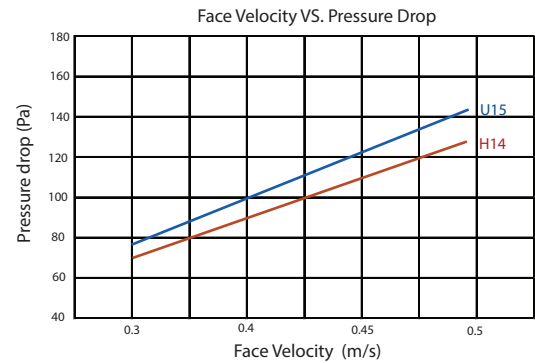

## Component Materials

Description	Material
Casing	Aluminum (Extrude Anodized)
Inlet & Top Place	Galvanize Steel
Diffuser	Powder-coated Steel
Insulation	PE
Gasket	EPDM


Description	Material
Media	Glass Filber
Spacer	Hot Melt
Face Guard	Powder-coated Steel
Sealant	Polyurethane
Max Operating Temp.& Hum.	80°C, 100% RH

## Technical Data

Dimension WxHxD (mm)	Face Velocity (m/s)	Rated Air Volume		Pressure Drop (Pa)	
		(m <sup>3</sup> /min)	(m <sup>3</sup> /h)	H14	U15
600 x 600 x 150	0.45	8.8	530	110	125
600 x 1210 x 150	0.45	18.0	1080	110	125

## Model Number

CFM - □ - □□ - E □ - □ - □

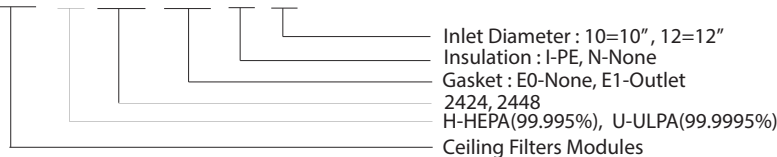

\* Recommend final pressure drop 25.4 mm. W.G.  
 \* Custom size available