

MAX FRESHAIR

Activated Carbon Pleated Filter

Removes Gases and Odors


Higher Efficiency

Die-cut beverage board

Consistent pleat alignment

Higher pleat count

Competitively priced

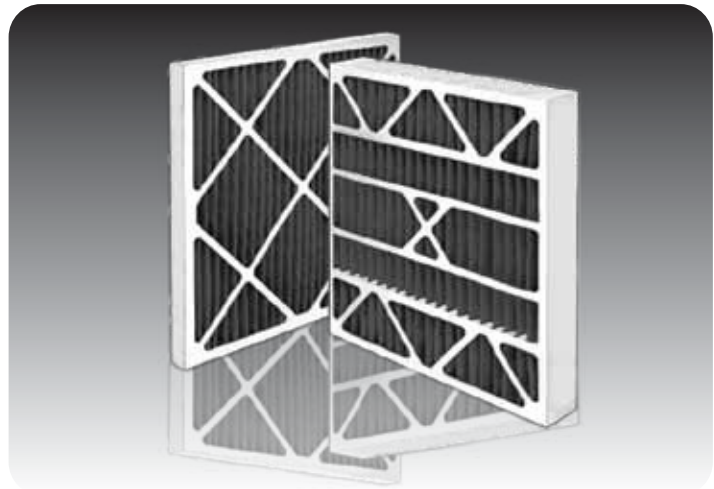

* MATERIAL	:	PET + Coconut Shell Carbon Polyester Fiber Coconut Shell Activated Carbon Galvanized Steel Backing Wire	120 g/m ² 280 g/m ² 160 g/m ²
* SPECIFICATION	:	Maximum Working Temperature Thickness of Filter Media Basic Weight	65 °C 3 mm. 560 g/m ²
* TECHNICAL	:	Filter Type Eurovent Rating Carbon Content	Pre Filter - Primary Efficiency G3 (EU3) 70%

Technical Data

Model No.	Size WxHxD (Inc.)	Actual Size WxHxD (mm.)	Rated Air Flow (CFM) @500 FPM	Initial Resistance (In W.G.) @500 FPM
FAC-205	24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4 594 x 594 x 44	2000	0.55"
FAC-210	12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4 289 x 594 x 44	1000	
FAC-405	24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4 594 x 594 x 95	2000	0.51"
FAC-410	12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4 289 x 594 x 95	1000	

* Custom size available

AIRMAX reserves our right to change design and specifications without notice.