


Maxwash

Washable Synthetic Pre Filter - Flat Type

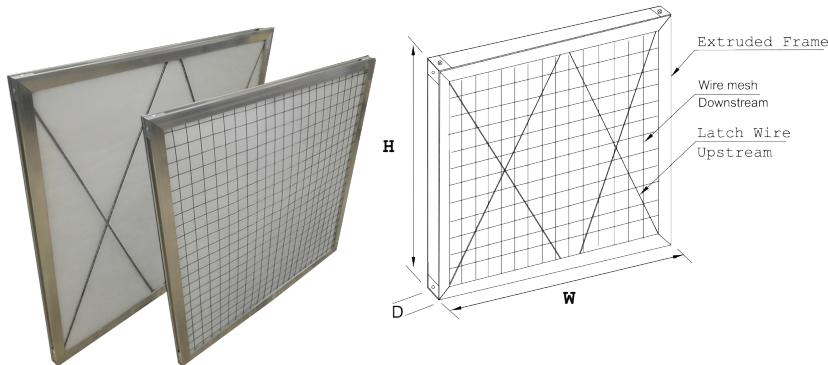

Suitable for high humidity conditions

Replaceable filter media

Progressively built-up thermally bonded polyester fibre with fire retardant

Long Lasting Extruded Aluminium Frame with durable construction

Virtually unlimited life

1", 2" Depth

Various sizes to meet requirement

Applications : Prefiltration of dust and dirt on air handing units.

- Kitchen hood
- Auto Air Conditioners
- Air Handling Unit
- Airport
- Computer Room
- Hospital
- Electronics Air Cleaner
- Fan Coil
- Office
- Hotel
- Department store
- General Dust

Type : Nonwoven media, Flat with anti-rust wire support grid.

Frame: Extruded aluminium profile.

Media: Polyester fibre (Washable)

EN779:2012 filter class: G2(AM150), G4(AM220), G4(AM290), G4(AM350), F5(AM560G)

ASHREA 52.2 :2007 filter class: MERV2 - MERV7.

Recommended final pressure drop: 250 Pa.

Temperature: 80 C

Holding frames: Front and side access housings and frames are available

Technical Data

Model	Width (mm.)	Height (mm.)	Depth (mm.)	Pressure drop (Pa)
AMW-F 24x24x1	594	594	22	110
AMW-F 12x24x1	289	594	22	160
AMW-F 12x12x1	289	289	22	210
AMW-F 24x24x2	594	594	47	110
AMW-F 12x24x2	289	594	47	160
AMW-F 12x12x2	289	289	47	210

AIRMAX reserves our right to change design and specifications without notice.

* Remark

1) Custom size available

2) Media Sheet and Roll is available.