

ULPAMAX

ULTRA LOW PENETRATING AIR - Separator Type


Eff. 99.9995 (U15), 99.99995% (U16) on 0.12µm

Individually scanned test and test report

Water Resistance media

Low Pressure Drop


Standard Capacity and High Capacity

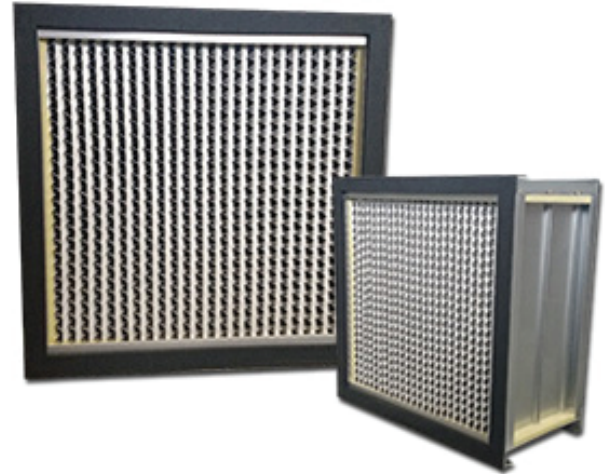

Airmax ULPA MAX™ is designed to energy resources saving. Every filters are individual test to ensure it meets an efficiency 99.9995% on 0.12 micron particle size. Frame is made from either galvanized steel or Aluminium. High capacity operation is achieved by designing additional media into the filter.

Component Materials

Frame	Galvanized Steel	Aluminium
Gasket	EPDM	Neoprene Rubber
Media	Ultra Fine Glass Fiber	
Sealant	PU Base	
Spacer	Aluminium Separator	
Max Operating Temp.	100°C	
Max Operating Hum.	100 % RH	

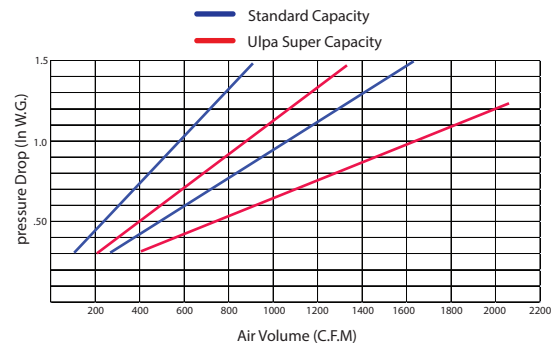


Technical Data

Nominal Size		Standard Airflow capacity cmh/cfm	Ulpa Super capacity cmh/cfm	Initial Pressure Drop (Pa)
(W x H x D) Inch	(W x H x D) mm.			
12 x 24 x 3	292 x 610 x 75	210/125	340/200	250
24 x 24 x 3	610 x 610 x 75	425/250	680/400	250
12 x 24 x 6	292 x 610 x 150	470/275	730/425	250
24 x 24 x 6	610 x 610 x 150	934/550	1450/850	250
12 x 24 x 12	292 x 610 x 292	850/500	1280/750	250
24 x 24 x 12	610 x 610 x 292	1700/1000	2550/1500	250

Model Code

UM-□□-□□-□□□□ G-□ E-□

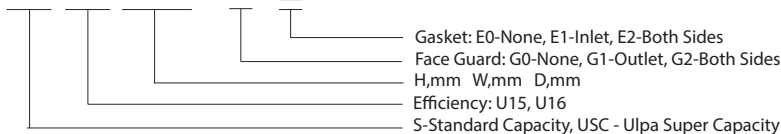

* Custom size available

AIRMAX reserves our right to change design and specifications without notice.